


■ Features:

- DC input socket availability is suitable for different user scenarios
- Pure Sine Wave output (THD < 3%)
- Power ON / OFF remote control
- Input & output fully isolation
- Output frequency 50 / 60Hz selectable by DIP switch
- Power saving mode to save energy
- Input Protection: Reverse Polarity (Fuse) / Under Voltage / Over Voltage
- Output Protection: Short Circuit / Overload / Over Temperature
- E13 / UL / CE / FCC approved

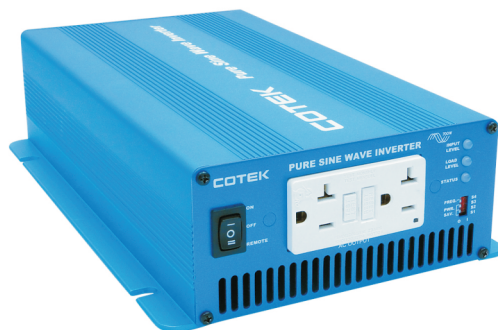

MODEL		SK700-112	SK700-124	SK700-148	SK700-212	SK700-224	SK700-248
Output	AC Voltage	100 / 110 / 120VAC			220 / 230 / 240VAC		
	Rated Power	700W					
	Surge Power	Load 101 ~ 115% (3 min.); 1400W (3 sec; resistive)					
	Waveform	Pure Sine Wave (THD < 3%)					
	Frequency	50 / 60 Hz ±0.5% selectable by DIP switch					
	AC Regulation	±5%			±3%		
	Power Factor Allowed	COSθ-90° ~ COSθ+90°					
	Standard Receptacles	NEMA5-15R / GFCI			Schuko / UK / Australia / Universal / IEC		
LED Indicator	Input voltage level, output load level and faulty status						
Input	No Load Current Draw	1.25A	0.64A	0.31A	1.2A	0.60A	0.28A
	Stand-by Current Draw	0.25A	0.15A	0.08A	0.25A	0.15A	0.08A
	DC Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC
	Voltage Range	10.5 ~ 15VDC	21.0 ~ 30VDC	42.0 ~ 60VDC	10.5 ~ 15VDC	21.0 ~ 30VDC	42.0 ~ 60VDC
	Efficiency (Typ.)	89%	91%	92%	91%	93%	94%
	Fuse	30Ax3	15Ax3	15Ax2	30Ax3	15Ax3	15Ax2
	Remote Control	CR6 / CR8 (optional)					
Protection	BAT. Low Alarm	11VDC	22VDC	44VDC	11VDC	22VDC	44VDC
	BAT. Low Shutdown	10.5VDC	21.0VDC	42.0VDC	10.5VDC	21.0VDC	42.0VDC
	Over Load	Shut down output voltage, restart to recover					
	Over Voltage	15.3VDC	30.6VDC	61.2VDC	15.3VDC	30.6VDC	61.2VDC
	Over Temperature	Shut down output voltage, recover automatically after temperature goes down					
	Output Short	Shut down output voltage, restart to recover					
	DC Input Reverse Polarity	By fuse					
Environment	Working Temp.	0 ~ +40°C					
	Working Humidity	20 ~ 90% RH non-condensing					
	Storage Temp. & Humidity	-30 ~ +70°C, 10 ~ 95% RH					
Safety & EMC	Safety Standards	Certified UL 458 (only for "GFCI" receptacles; SK700-148 only meet UL 458)			Certified EN 60950-1		
	Isolation Resistance	I/P - O/P: 100M Ohms / 500VDC					
	EMI Conduction & Radiation	Certified FCC class A			Certified EN 55022; EN 61000-3-2, -3-3, -6-4; EN 61204-3		
	EMS Immunity	----			Certified EN 61204-3; EN 55024; EN 61000-6-2; ENV 50204; IEC 61000-4-2, 3, 4, 5, 6, 8, 11		
	E-MARK	----			Certified CISPR 25; ISO 11452-2; ISO 7637-2		
Others	Dimension (WxHxD)	179.0x72.0x273.0 mm / 7.047x2.835x10.748 inch					
	Packing	3.36kg; 6pcs / 21.2kg / 2.46CUFT					
	Cooling	Load control fan					
	Application	Home and Office appliances, Portable Power Equipment, Vehicle, Yacht and Off-Grid Solar power systems ...etc.					