

Terminal Fuse Blocks

MRBF—Marine Rated Battery Fuse

Satisfies ABYC 7" circuit protection rule by mounting on a 3/8" battery post, battery switch, or bus bar



5191



2151


- Appropriate for DC Main, inverter, windlass, and bow thruster circuit protection
- Weatherproof – suitable for small open-cockpit boats and other harsh environments
- Insulating cap prevents accidental shorts
- Fuses sold separately (p. 46)

Specifications

Voltage Max. Operating	58V DC
Amperage Max. Operating	300A
Terminal Fuses Available	30–300 Amps


Regulatory

Meets SAE J1171 external ignition protection requirements

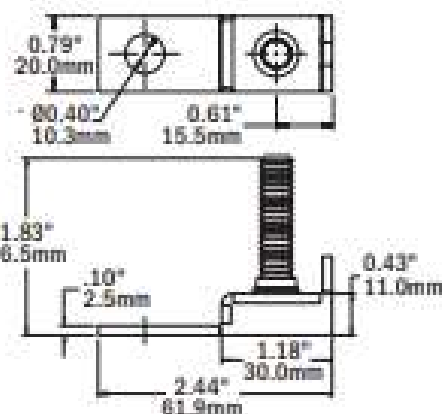

5191

PN	Terminal Stud Size	Mounting Hole	Fuses
5191	M8 (5/16"-18)	3/8"	1
2151	M8 (5/16"-18)	3/8"	2

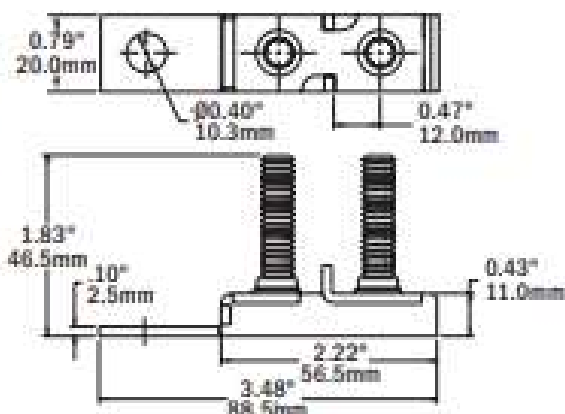

2151

Related Products



Terminal MRBF Fuses
p. 46